



Name **TRF416 Standard Setup**

Track


《Front》

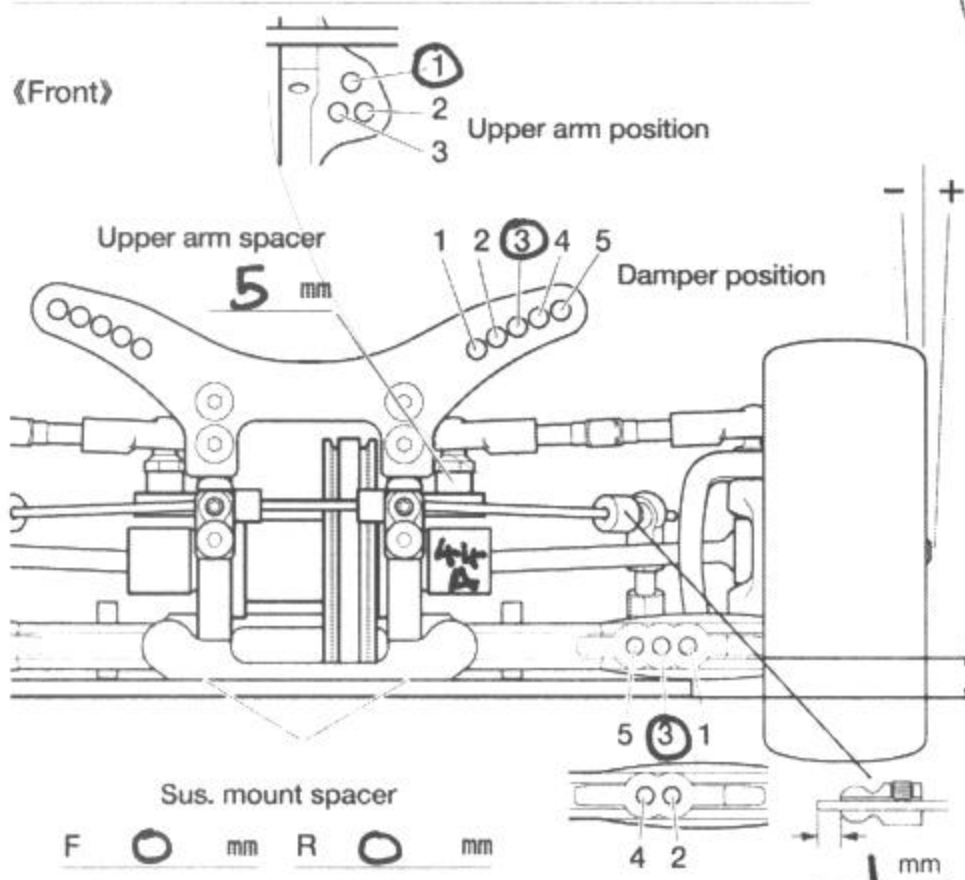


《Rear》

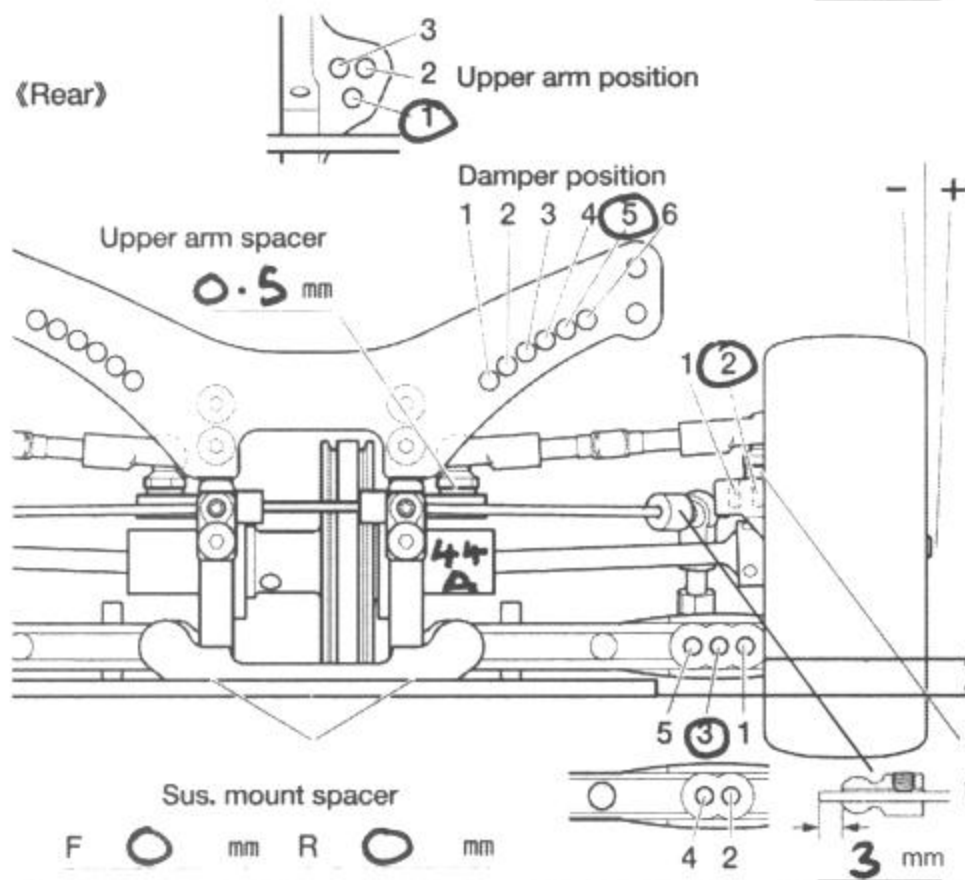

Belt tension - rear

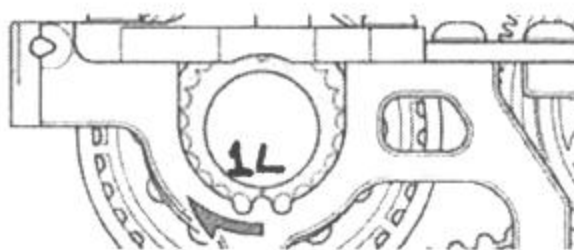

Belt tension - front

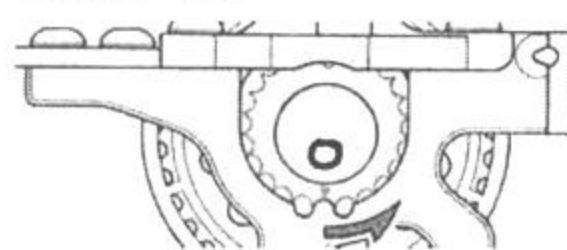

Front axle **2° 4°**

Camber angle

Ground clearance mm

Rebound stroke mm

Front drive **One-way** Direct

Stabilizer None **S** M H

Wheel spacer mm

Pulley position Up **Down**

Notes:

Rear axle **0°**

Camber angle

Ground clearance mm



Rebound stroke mm

Stabilizer None **S** M H

Wheel spacer mm


Pulley position Up **Down**

Upper arm spacer **0.5 mm**

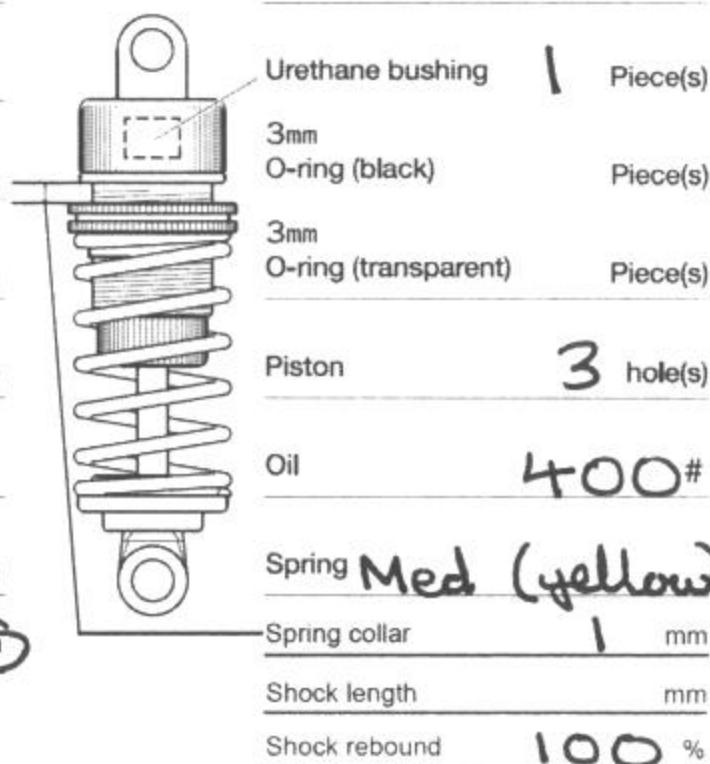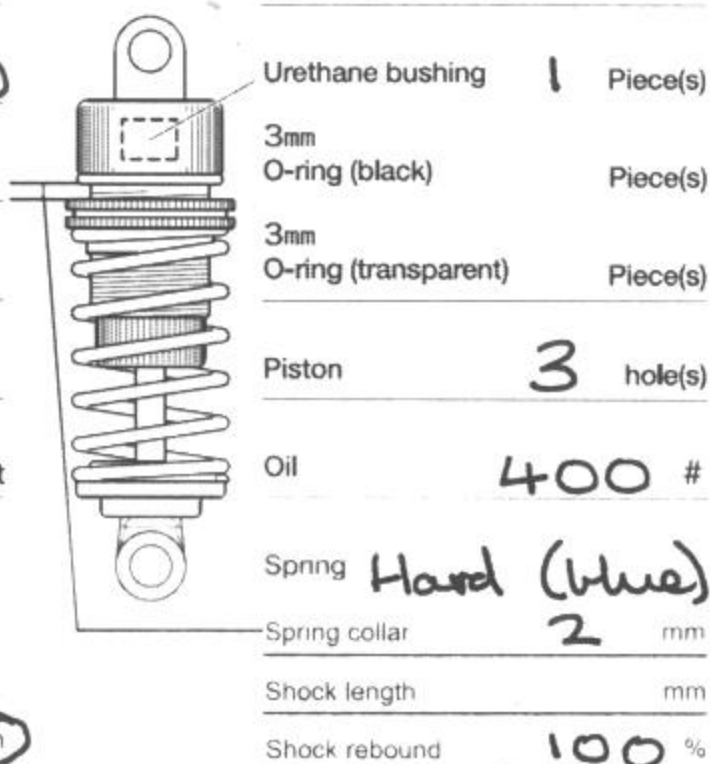

Toe angle (front)

F sus. mount Front **18** Rear **1A** R sus. mount Front **1x8** Rear **10**

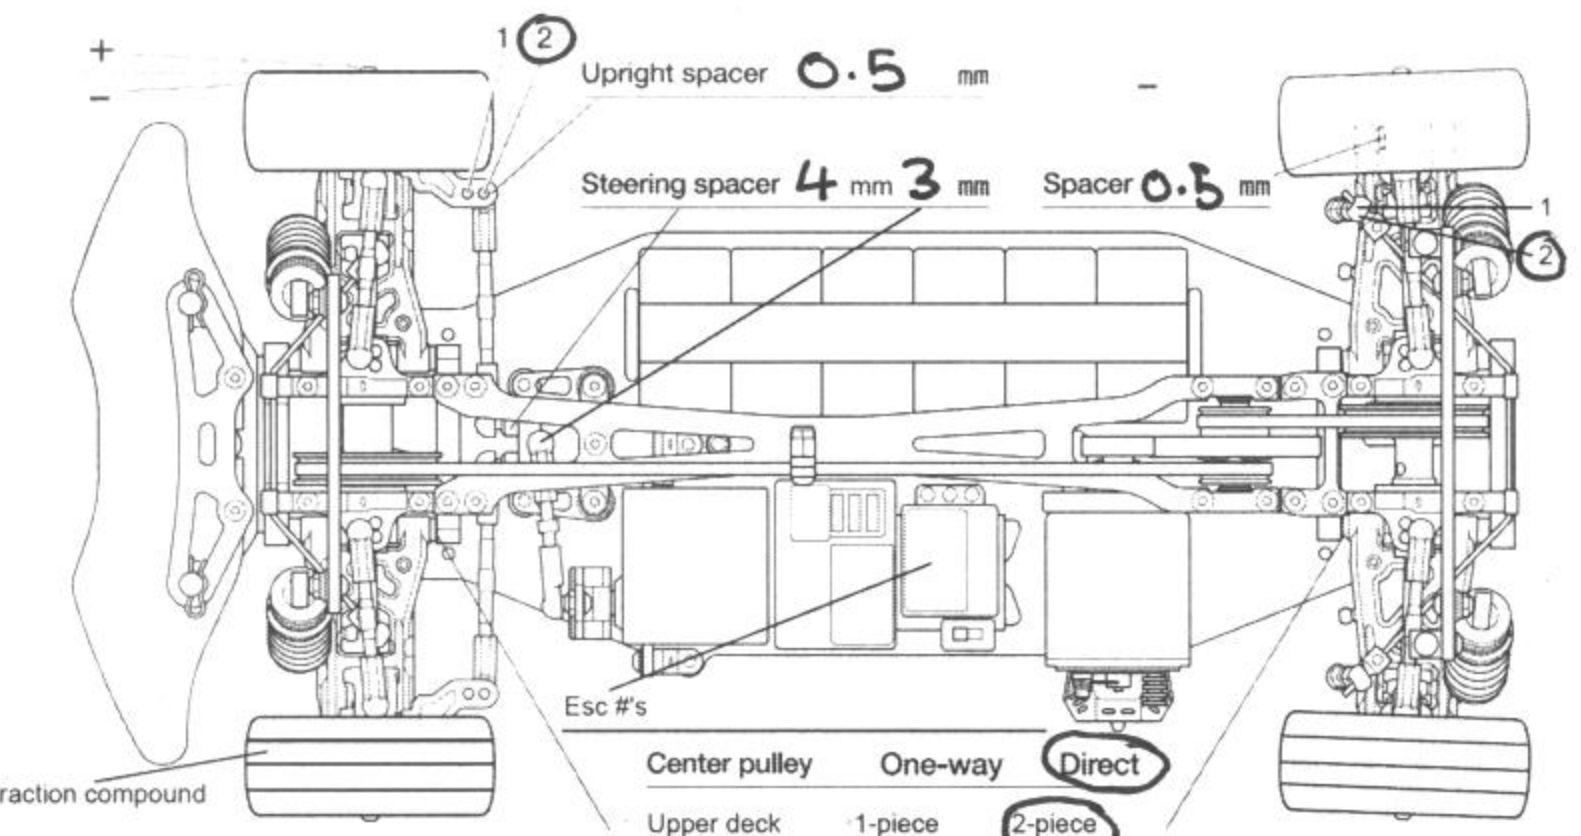

Lower deck **2.25** mm

F sus. arm spacer **2/2+0.5** mm

R sus. arm spacer **1/3+0.5** mm

Motor

Spur gear Pinion gear

Center pulley **18** Diff pulley **37**

Battery

Body

Wing

Tire

Wheel

Tire insert

Best lap